




NorthStar heavy duty batteries excel at providing superior vibration resistance, high cranking amps and high reserve capacity. No other battery does more.

- Pure lead AGM technology delivers exceptional CCA ratings
  - and reserve capacity cycling ability
  - Quick starting every time
  - Cycles over 900 times to 50% depth of discharge
- Faster recharge than conventional batteries

- Proudly made in the USA at our state-of-the-art battery plant
  - OEM fit is ensured - built to exact BCI standards
  - Housed in advanced plastics for durability performance and heat resistance
  - Advanced AGM construction means no water levels to check or terminals to clean
- Approved as non-hazardous cargo for ground sea and air transport DOT 49CFR173.159(d), (i) and (ii)

# NSB-AGM34M

## Nominal Technical Specifications

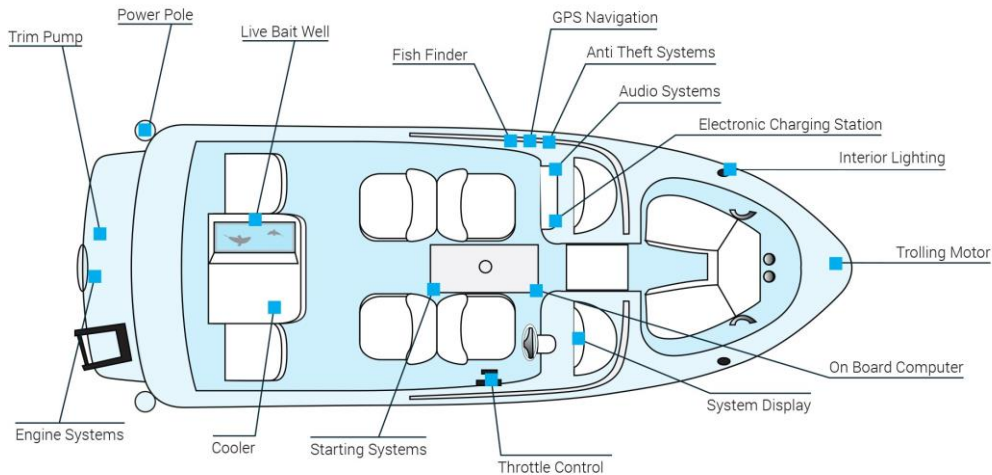


### Technical data

|                                    |                      |
|------------------------------------|----------------------|
| Terminal configuration             | Marine/SAE           |
| Terminal illustration              |                      |
| Pulse cranking amps                | 1500 A               |
| CCA rating at -18°C (0°F)          | 880 A                |
| CA/MCA rating at 0°C (32°F)        | 1050 A               |
| Reserve capacity                   | 134 min              |
| Capacity - 20 hour rate (1.75 vpc) | 65 Ah                |
| Internal resistance                | 3.6 mΩ @ 25°C (77°F) |
| Short circuit current              | 3100 A               |
| Warranty                           | 3 years full         |
| Quantity per layer                 | 20                   |
| Quantity per pallet                | 40                   |

All NorthStar batteries are compliant with Battery Council International standards, UL approved and UN2800 certified. NorthStar is registered to ISO 9001 and ISO 14001.

### Technical Drawing

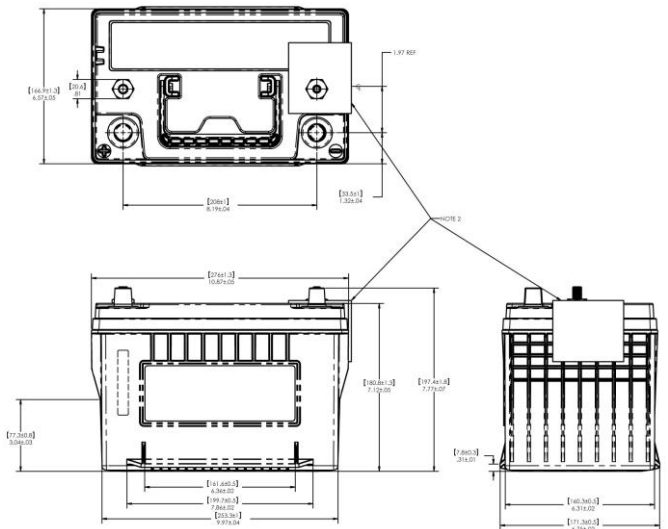

QUALITY ASSURED  
**ISO 9001**



Distributed by:

